



COLOR SWATCHES
detailed item info on back

Staple | Day

Staple | Night

Staple | Fawn

Staple | Foundation

Staple | Horizon

Staple | Tempest

Angle

available in 3 colorways

Cross

available in 4 colorways

Deco

available in 4 colorways

Petals

available in 4 colorways



There are very few products as iconic as traditional encaustic cement tiles. Across Europe, this style of material was the defacto choice for the design concious consumer around the turn of the 20th century.

We call our modern reboot of this style of material Memory in tribute to those talented artisans that first gave the product life. We've taken pains to keep the production method and materials as authentic as possible to retain the soul of this iconic material while breathing new life into the style to fit the modern market.

A Memory over a century in the making is waiting for you

INSTALLATION & MAINTENANCE


- ◆ Encaustic cement tiles are 100% natural artisanal products made 100% by hand with natural materials and manual practices. As with any handmade good, some degree of imperfections should be anticipated and celebrated!
- ◆ Inspect all product prior to installation for any visible defects or unacceptable color/ shade variation. Claims are not accepted after installation. Mixing from multiple cartons is recommended during installation
- ◆ Soak tile for 30 seconds prior to installation. Install using polymer or latex modified thin set mortars. For best results, tile should be back-buttered with mortar.
- ◆ Suggested grout width is 2-3mm
- ◆ For best results cutting, use a wet saw or angle grinder with a continuous rim finishing masonry blade. After cutting, smooth any rough or sharp edges with a diamond honing stone or pad
- ◆ Before grouting follow mortar manufacturer's instructions to allow for full cure of thin set - usually 36 to 48 hours. Grout release is recommended prior to grouting. If using a contrasting grout color, we suggest a mockup as some darker colors can cause surface staining and affect the appearance.
- ◆ After initial wash ensure all remaining "grout haze" is buffed off with a dry cloth before 24 hours have elapsed
- ◆ Use of a protectorant sealer or wax is recommended. Factory applied oil-based sealer must be stripped if using a water-based product. Always do a test-patch prior to application. For outdoors, ensure to use a UV-resistant sealer as cement tile can fade.
- ◆ To clean use a damp sponge with warm water. For heavy cleaning use a pH neutral cleaner with a damp sponge. For stubborn surface spots, fine grit sandpaper can be used over the entire installation.
- ◆ For more detailed instructions and best practices, please visit our website. Longform installation care and maintenance document available for more detailed specification information.

TECHNICAL SPECIFICATIONS

Technical Characteristics	ASTM Test Result	ASTM/ANSI Test Method
Water Absorption %	<10%	A 187.1
Frost Resistance	Pass	C1026
Abrasion Resistance	<0.45 g/cm ²	TCVN 6065 :1995
Breaking Load	>100 daN/tile	TVCN 6065 : 1995

PACKAGING

Size	PC/CTN	Sqft/ctn (Sqm/ctn)	Carton/Pallet	Sqft/plt (Sqm/plt)	Lbs/ctn (Kgs/ctn)	Lbs/plt (Kgs/plt)
8x8" (200x200)	12	5.17 (0.48)	60	310.00 (28.80)	34.39 (15.60)	2,063.40 (936.00)




V2

Moderate Variation




Deco Sky | Staple Horizon


ANGLE




Noon | MEMO88ANNIO



Soft | MEMO88ANSO



Sky | MEMO88ANSK




Shown in Noon - 4 Layout Variants

CROSS



Noon | MEMO88CRNO



Soft | MEMO88CRSO



Smoke | MEMO88CRSM




Storm | MEMO88CRST



Shown in Soft - 1 Layout Variants


DECO




Noon | MEMO88DENO





Soft | MEMO88DESO



Smoke | MEMO88DESM




Sky | MEMO88DESK




Shown in Smoke! - 2 Layout Variants


PETALS




Noon | MEMO88PENO




Soft | MEMO88PESO



Dune | MEMO88DEDU



Storm | MEMO88PEST

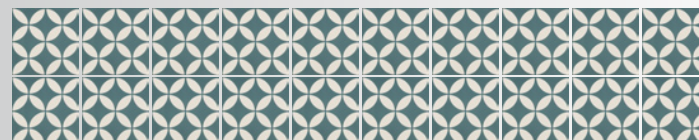

Shown in Storm - 1 Layout Variants

